

## Electrical Terminals

### Vinyl Insulated Terminals

- Temperature range -40°C to 105°C (-40°F to 221°F)
- Flared rigid molded Polyvinyl Chloride Sleeve
- Funneled for easy wire entry
- UL listed


### Nylon Insulated Terminals

- Flared, seamless brass sleeve for excellent electrical contact
- Temperature range -40°C to 105°C (-40°F to 221°F)
- Flared molded Nylon Sleeve
- UL listed

### Heat Shrink Insulated Terminals

- Pre-insulated terminals and connectors protect against challenges of environment.
- Corrosion Resistance** -The adhesive lined heat shrink materials, when properly crimped and shrunk, provides a seal that is resistant to water, salt, steam and other related contaminants.
- Improved Mechanical Performance** - The heat shrink tubing adheres, when shrunk, to both the connector and wire insulation, providing improved pullout strength and strain relief.

## Ring Terminals

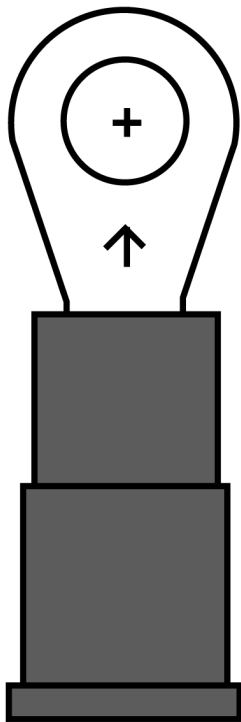

Wire GA.	Color	Stud Size	100 Pcs. Vinyl Insulated	100 Pcs. Nylon Insulated	50 Pcs. Heat Shrink Insulated
6	Blue	1/4"	Discontinued	14-42N	
6	Blue	3/8"		14-44N	
6	Blue	1/2"	14-46	14-46N	
8	Red	10		14-51N	
8	Red	1/4"	14-52	14-52N	
8	Red	5/16"		14-53N	
8	Red	3/8"		14-54N	
8	Red	1/2"	14-56	14-56N	
12-10	Yellow	6	14-13	14-13N	
12-10	Yellow	8	14-14	14-14N	14-14H
12-10	Yellow	10	14-19	14-19N	14-19H
12-10	Yellow	1/4"	14-15	14-15N	14-15H
12-10	Yellow	5/16"	14-16	14-16N	
12-10	Yellow	3/8"	14-17	14-17N	14-17H
12-10	Yellow	1/2"	14-18	14-18N	
16-14	Blue	4	14-21		
16-14	Blue	6	14-22	14-22N	14-22H
16-14	Blue	8	14-24	14-24N	14-24H
16-14	Blue	10	14-23	14-23N	14-23H
16-14	Blue	1/4"	14-25	14-25N	14-25H
16-14	Blue	5/16"	14-26	14-26N	14-26H
16-14	Blue	3/8"	14-27	14-27N	14-27H
22-18	Red	4	14-31		
22-18	Red	6	14-32	14-32N	14-32H
22-18	Red	8	14-34	14-34N	14-34H
22-18	Red	10	14-36	14-36N	14-36H
22-18	Red	1/4"	14-35	14-35N	
22-18	Red	5/16"	14-37	14-37N	
22-18	Red	3/8"	14-38	14-38N	